

PRODUCT CATALOG



THE ART OF
MOVING FORWARD



INDEX

ABOUT US	4
TIRE SIDEWALL DIAGRAM	13
PRODUCT RANGE	14 - 15
AGRICULTURAL TIRES	16 - 46
VF Radial Tractor Tires	20
Radial Tractor Tires	21 - 25
Radial Flotation Tires	25
Front Tractor Tires	30 - 32
Rear Tractor Tires	33- 35
Irrigation Tires	36
Harvester Tires	36 - 37
Flotation Tires	38 - 42
Implement Tires	43 - 46
Forestry Tires	46
INDUSTRIAL, EM, OTR TIRES	48 - 61
All Steel Radial Tires	52
Radial EM Tires	53 - 54
EM / Industrial Tires	54 - 59
Compactor Tires	60
Forklift Tires	61
Solid Forklift Tires	61
LCV TIRES	64 - 69
Light Truck & Minibus Tires	68 - 69
CORRESPONDING TIRE SIZE	74







Built on Expertise Since 1991

Since 1991, we have been on a journey to achieve excellence in the global market and stand out with our expertise. Advancing with a vision to reach leadership and become a global brand, we are committed to making a difference.



The Art of Being a World Brand

With a network of over 400 authorized dealerships in Turkey and reaching 90 countries across 6 continents worldwide, we are steadily growing to become a globally recognized brand with our high-quality products.



Comprehensive Product Portfolio

As Özka Tires, we utilize advanced production systems to create a diverse range of products. Our radial agricultural tire selection includes options for tractors, harvesters, and trailers, while the conventional agricultural tire category features products for tractors, trailers, harvesters, and garden/field use. In the industrial tire category, we offer options suitable for excavation, road construction machinery, and forklifts. In addition, our newly introduced solid forklift tires, VF radial tractor tires, all-steel radial tires, and steel-belted radial EM tires. Additionally, we manufacture tires for light commercial vehicles, such as pick-up/minibus. Our solutions, crafted with expertise, address the varied needs of the industry.



The Art of Innovation

Our R&D team develops products based on our expertise, ensuring the quality and safety of our products from raw material input to post-shipment control. We conduct our business with innovative solutions and certify our quality with ISO9001, ISO14001, ISO45001, and ISO27001 management system certificates.



Customer-Centric Approach

With a customer-centric approach, on-time delivery, and quick solutions, we offer robust, reliable, and compliant tires that meet national and international standards. Managing all processes with expertise, we efficiently handle our order processes in a corporate infrastructure that works seamlessly through renewed CRM, B2B, and SAP systems. Our post-sales support and technical service teams provide swift solutions to inquiries, suggestions, and complaints.



The Art of Moving Forward

We consider our young, dynamic, and experienced team of 1500 employees as the foundation for sustainable growth. Actively participating in activities such as corporate training, seminars, and exhibitions for the development of human resources, we consistently strive for improvement goals.

THE ART OF BUILDING TRUST

7
Year
WARRANTY

OUR CERTIFICATES





THE ART OF MOVING FORWARD

We're not following the path everyone else takes. We draw our own path to achieve perfection and make a difference with our expertise.

Just like an artist meticulously crafts every detail, giving meaning to their work, we approach our tires with an artistic perspective. And by combining this approach with our superior manufacturing technologies, we create design masterpieces.

This catalog is an interpretation of Özka's expertise through an artistic perspective.



THE ART OF UNDERSTANDING REAL NEEDS

Explore Özka's wide range of products designed to
fulfill diverse customer requirements.





THE ART OF HIGH PERFORMANCE

Choose from a range of radial and conventional tires
that suit you best and meet Özka's superior performance and power.







**EXPERTISE IN
EVERY DETAIL**



ÖZKA

PRODUCT RANGE

RADIAL TRACTOR TIRES



FLEXTURE



AGROLOX



AGRO10



AGRO11

RADIAL FLOTATION TIRES



AGRIGOR20

FRONT TRACTOR TIRES



KNK30



KNK32



KNK33



KNK35



KNK50

REAR TRACTOR TIRES



KNK50



KNK53

IRRIGATION TIRES



KNK55

HARVESTER TIRES



KNK36



KNK48



KNK50

FLOTATION TIRES



KNK22



KNK25



KNK26

FLOTATION TIRES



KNK27



KNK28



KNK42



KNK46



KNK48



KNK52



KNK56

IMPLEMENT TIRES



KNK41



KNK42



KNK48



KNK50



KNK52



KNK54



KNK140

FORESTRY TIRES



FRS40

ALL STEEL RADIAL TIRES



ORMER X30

RADIAL EM TIRES



STEXOR40



OR71

EM / INDUSTRIAL TIRES



KNK44



KNK65



KNK66



IND80



KNK12



IND85

EM / INDUSTRIAL TIRES



IND88



KNK70



KNK72



KNK74

COMPACTOR TIRES



KNK77



KNK88

FORKLIFT TIRES



KNK40

SOLID FORKLIFT TIRES



SOLIFT

LIGHT TRUCK & MINIBUS TIRES



KNK20



KNK24



KNK25



KNK126

AGRICULTURAL TIRES

FLEXTURE	AGROLOX	AGRO10	AGRO11
AGRIGOR20	KNK30	KNK32	KNK33
KNK35	KNK50	KNK53	KNK55
KNK36	KNK48	KNK22	KNK25
KNK26	KNK27	KNK28	KNK42
KNK46	KNK52	KNK56	KNK41
KNK54	KNK140	FRS40	











FLEXTURE

VF RADIAL
TRACTOR TIRES

NEW
PATTERN

- Significantly increased flexibility thanks to its advanced technology
- Enhanced load-carrying capacity at lower pressure, preventing soil compaction
- FLEXTURE Greater convenience and operator comfort by removing the need to adjust tire pressure between roads and fields, saving time

70 SERIES	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	*NEW TIRE	VF 800/70 R38	TL	804	2085	184/181	-	-	D/E	9000/8250	23	6547	942
75 SERIES	*NEW TIRE	VF 710/75 R42	TL	705	2133	181/178	-	-	D/E	8250/7500	23	6698	971
90 SERIES	*NEW TIRE	VF 380/90 R50	TL	385	1955	175	-	-	D	6900	64	6140	920
	*NEW TIRE	VF 380/90 R46	TL	383	1852	173	-	-	D	6500	64	5815	875

*The marked product will be launched during 2025.

ÖZKA



AGROLOX | RADIAL TRACTOR TIRES

AGRICULTURAL TIRES

- Increased traction with an updated variable-angled tread pattern for both soil and road usage
- Comfortable driving both in the field and on the road
- Extra protection in the tread area against fatigue and cracking thanks to the increased tooth block
- Increased productivity with special pattern design
- High resistance against punctures and tears thanks to 3-layer bar structure

60 SERIES	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946032900	900/60 R32	TL	905	1870	182/185	854	73	D/A8	8500/9250	58	5543	829
65 SERIES	1946518320	320/65 R18	TL	319	873	109/109	72	49	A8/B	1030/1030	23	2612	395
	1946520440	440/65 R20	TL	441	1080	138/141	142	57	D/A8	2360/2580	35	3213	483
	1946524440	440/65 R24	TL	441	1182	135/138	172	60	D/A8	2180/2385	35	3534	534
	1946528440	440/65 R28	TL	445	1285	131/134	197	60	D/A8	1950/2120	35	3857	585
	1946524481	480/65 R24	TL	479	1234	133/136	195	61	D/A8	2060/2255	23	3681	555
	1946528481	480/65 R28	TL	479	1335	142/145	221	61	D/A8	2650/2900	35	3998	605
	1946528540	540/65 R28	TL	550	1413	149/152	281	64	D/A8	3250/3560	35	4219	636
	1946530540	540/65 R30	TL	550	1470	150/153	301	65	D/A8	3350/3650	35	4396	664
	1946534540	540/65 R34	TL	550	1575	152/155	321	69	D/A8	3550/3875	35	4725	716
	1946538540	540/65 R38	TL	550	1675	153/156	363	69	D/A8	3650/4000	35	5039	767
	1946528600	600/65 R28	TL	601	1491	154/157	338	63	D/A8	3750/4105	35	4407	657
	1946538601	600/65 R38	TL	601	1745	159/162	413	69	D/A8	4375/4750	35	5237	795
70 SERIES	*NEW TIRE	650/65 R34	TL	601	1644	161/164	-	-	D/A8	4620/4500	35	5162	752
	1946538650	650/65 R38	TL	650	1820	163/166	514	77	D/A8	4875/5300	35	5449	825
	1946542650	650/65 R42	TL	650	1913	165/168	563	77	D/A8	5150/5600	35	5744	872
	*NEW TIRE	200/70 R16	TL	197	686	94/94	854	73	A8/B	670/670	35	2154	317
	1947020261	260/70 R20	TL	258	872	113/113	60	38	A8/B	1150/1150	35	2738	403
	1947016281	280/70 R16	TL	282	798	112/112	62	39	A8/B	1120/1120	35	2506	345
	1947018281	280/70 R18	TL	282	849	114/114	67	39	A8/B	1180/1180	35	2666	366
	1947020281	280/70 R20	TL	282	900	116/116	67	43	A8/B	1250/1250	35	2826	387
	1947020301	300/70 R20	TL	295	952	120/117	89	42	A8/B	1400/1285	35	2989	410
	1947020321	320/70 R20	TL	319	982	113/113	93	43	A8/B	2535/2535	23	3083	448
	1947028320	320/70 R28	TL	319	1189	119/119	117	55	A8/B	1360/1360	23	3585	547
	1947020361	360/70 R20	TL	357	1042	129/129	125	50	A8/B	1850/1850	35	3272	452
	*NEW TIRE	360/70 R24	TL	357	1152	122/119	-	-	A8/B	1500/1360	23	3617	527
	1947024381	380/70 R24	TL	380	1190	125/128	153	57	D/A8	1650/1800	23	3556	537
	1947028381	380/70 R28	TL	380	1293	127/130	168	57	D/A8	1750/1910	23	3879	588
	1947024421	420/70 R24	TL	418	1248	130/133	175	60	D/A8	1900/2080	23	3720	560
	1947028421	420/70 R28	TL	418	1351	133/136	192	60	D/A8	2060/2250	23	4043	612
	1947028481	480/70 R28	TL	480	1425	140/143	236	64	D/A8	2500/2730	23	4253	641
	1947030481	480/70 R30	TL	479	1478	141/138	254	55	A8/B	2575/2360	23	4641	628
	1947034481	480/70 R34	TL	479	1580	143/146	286	62	D/A8	2725/2980	23	4739	718
	1947038481	480/70 R38	TL	480	1685	145/148	319	62	D/A8	2900/3170	23	5067	771
	*NEW TIRE	520/70 R30	TL	516	1536	145/142	-	-	A8/B	2900/2720	23	4823	698
	1947034521	520/70 R34	TL	516	1640	148/151	334	63	D/A8	3150/3440	23	4908	742
	1947038521	520/70 R38	TL	516	1749	150	386	63	D	3350	23	5223	793
	1947038581	580/70 R38	TL	577	1827	155	444	69	D	3875	23	5441	823
	1947042580	580/70 R42	TL	587	1879	158/158	488	#VALUE!	A8/B	4250/4250	23	5900	812
	1947028601	600/70 R28	TL	591	1551	157/160	173	53	D/A8	4125/4500	35	4684	698
	*NEW TIRE	600/70 R30	TL	601	1602	161/158	-	-	D/A8	4620/4250	35	5030	725
	*NEW TIRE	600/70 R34	TL	601	1704	160/160	-	-	A8/B	4500/4500	35	5351	776
	1947046620	620/70 R46	TL	625	2036	162/165	608	76	D/A8	4750/5200	23	6124	931
	1947038710	710/70 R38	TL	716	1959	171/174	702	80	D/A8	6150/6730	35	5842	880
	1947042710	710/70 R42	TL	716	2061	173/176	741	81	D/A8	6500/7120	35	6162	931

*The marked product will be launched during 2025.

Product Code		Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
85 SERIES	1948520281	280/85 R20	TL	282	984	112/109	88	43	A8/B	1120/1030	23	3090	421
	*NEW TIRE	280/85 R28	TL	282	1187	118/115	-	-	A8/B	1320/1215	23	3727	551
	*NEW TIRE	320/85 R34	TL	319	1408	141/138	-	-	A8/B	2570/2360	52	5531	836
	*NEW TIRE	340/85 R24	TL	343	1188	125/122	-	-	A8/B	1650/1500	23	3730	542
	*NEW TIRE	380/85 R24	TL	380	1256	131/128	-	-	A8/B	1950/1800	23	3944	570
	*NEW TIRE	380/85 R28	TL	380	1357	133/130	-	-	A8/B	2600/1900	23	4260	620
	*NEW TIRE	380/85 R34	TL	380	1510	137/137	-	-	A8/B	2300/2300	23	4741	697
	1948528420	420/85 R28	TL	418	1425	139/139	222	64	A8/B	2430/2430	23	4252	641
	*NEW TIRE	460/85 R38	TL	455	1747	149/146	-	-	A8/B	3250/3000	23	5486	803
	1948520838	520/85 R38	TL	516	1849	155/155	417	75	A8/B	3880/3880	23	5531	836
	1948520840	520/85 R38*	TL	516	1849	169/169	452	75	A8/B	5800/5800	52	5531	836
	1948520842	520/85 R42	TL	516	1951	157/157	475	76	A8/B	4130/4130	23	5851	887

*Reinforced for Harvester

90 SERIES	1949042321	320/90 R42	TL	319	1643	139/139	93	37	A8/B	2430/2430	23	5159	696
	1949030420	420/90 R30	TL	418	1518	147/147	235	63	A8/B	3080/3080	35	4531	683
95 SERIES	*NEW TIRE	230/95 R40	TL	228	1454	122/122	-	-	A8/B	1500/1500	35	4566	688

*The marked product will be launched during 2025.





AGRO10

RADIAL TRACTOR TIRES

- Comfortable drive due to flexible sidewall structure
- Mud repellent features due to the specially designed tread pattern and void area design
- High performance due to deep treads and wide footprint

AGRICULTURAL TIRES

	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
65 SERIES	1946516320	320/65 R16	TL	319	822	117/120	67	40	D/A8	1285/1405	35	2432	367
	1946520340	340/65 R20	TL	343	950	124/127	86	38	D/A8	1600/1750	35	2817	427
	1946520420	420/65 R20	TL	418	1054	135/138	131	45	D/A8	2180/2385	35	3114	469
	1946524440	440/65 R24	TL	445	1185	128/131	177	50	D/A8	1800/1950	35	3542	535
	1946528440	440/65 R28	TL	445	1285	131/134	203	52	D/A8	1950/2120	35	3857	585
	1946524480	480/65 R24	TL	480	1235	133/136	198	52	D/A8	2060/2240	35	3683	555
	1946528480	480/65 R28	TL	480	1337	142/145	223	52	D/A8	2650/2900	35	4004	606
	1946524540	540/65 R24	TL	550	1320	146/149	255	55	D/A8	3000/3250	35	3924	589
	1946528540	540/65 R28	TL	550	1420	149/152	292	57	D/A8	3250/3550	35	4238	639
	1946530540	540/65 R30	TL	550	1470	150/153	302	55	D/A8	3350/3650	35	4396	664
	1946534540	540/65 R34	TL	550	1575	152/155	328	59	D/A8	3550/3875	35	4725	716
	1946538540	540/65 R38	TL	550	1675	153/156	368	60	D/A8	3650/4000	35	5039	767
	1946528600	600/65 R28	TL	591	1491	154/157	355	58	D/A8	3750/4125	35	4439	668
	1946530600	600/65 R30	TL	601	1542	155/158	351	58	D/A8	3875/4245	35	4546	685
	1946534600	600/65 R34	TL	601	1644	157/160	390	58	D/A8	4125/4515	35	4920	744
	1946538600	600/65 R38	TL	595	1750	159/162	425	58	D/A8	4375/4750	35	5251	797
	1946538650	650/65 R38	TL	650	1820	163/166	516	72	D/A8	4875/5300	35	5449	825
	1946542650	650/65 R42	TL	650	1913	165/168	585	72	D/A8	5150/5600	35	5744	872
70 SERIES	1946526750	750/65 R26	TL	755	1640	166/163	572	63	A8/B	5300/4875	35	4844	722
	1946532800	800/65 R32	TL	800	1858	178/175	749	68	A8/B	7500/6900	46	5509	824
	1947016240	240/70 R16	TL	245	745	104/104	45	35	A8/B	900/900	35	2234	339
	1947016260	260/70 R16	TL	260	770	109/109	50	37	A8/B	1030/1030	35	2305	349
	1947020260	260/70 R20	TL	260	875	113/113	62	38	A8/B	1150/1150	35	2634	401
	1947016280	280/70 R16	TL	282	798	112/112	63	40	A8/B	1120/1120	35	2384	360
	1947018280	280/70 R18	TL	282	849	114/114	67	40	A8/B	1180/1180	35	2544	385
	1947020280	280/70 R20	TL	282	900	116/116	73	43	A8/B	1250/1250	35	2704	411
	1947020300	300/70 R20	TL	295	952	120/117	88	42	A8/B	1400/1285	35	2851	432
	1947020320	320/70 R20	TL	319	982	113/113	98	43	A8/B	1150/1150	23	2936	444
	1947024320	320/70 R24	TL	319	1095	116/116	104	47	A8/B	1250/1250	23	3288	499
	1947020360	360/70 R20	TL	357	1042	129/129	123	50	A8/B	1850/1850	35	3106	468
	1947024360	360/70 R24	TL	357	1152	122/122	135	52	A8/B	1500/1500	23	3449	522
	1947028360	360/70 R28	TL	357	1255	125/125	157	53	A8/B	1650/1650	23	3772	573
	1947020380	380/70 R20	TL	380	1082	122/122	141	50	A8/B	1500/1500	23	3219	484
	1947024380	380/70 R24	TL	380	1190	125/125	160	55	A8/B	1650/1650	23	3556	537
	1947028380	380/70 R28	TL	380	1293	127/127	173	55	A8/B	1750/1750	23	3879	588
	1947024420	420/70 R24	TL	418	1248	130/130	184	54	A8/B	1900/1900	23	3720	560
	1947028420	420/70 R28	TL	418	1351	133/133	193	54	A8/B	2060/2060	23	4043	612
	1947030420	420/70 R30	TL	418	1400	134/131	211	55	A8/B	2120/1950	23	4198	636
	1947024460	460/70 R24	TL	460	1260	159/159	206	47	A8/B	4380/4380	46	3754	565
	1947024480	480/70 R24	TL	480	1320	138/135	214	54	A8/B	2360/2180	23	3924	589
	1947026480	480/70 R26	TL	480	1380	139/136	245	57	A8/B	2430/2240	23	4109	618
	1947028480	480/70 R28	TL	480	1425	140/140	238	58	A8/B	2500/2500	23	4253	641
	1947030480	480/70 R30	TL	480	1480	141/138	256	55	A8/B	2575/2360	23	4424	668
	1947034480	480/70 R34	TL	479	1580	143/140	284	59	A8/B	3250/2500	35	4739	718
	1947038480	480/70 R38	TL	480	1685	145/142	322	62	A8/B	2900/2650	23	5067	771
	1947034520	520/70 R34	TL	516	1640	148/146	364	63	A8/B	3150/3000	23	4908	742
	1947038520	520/70 R38	TL	516	1750	150/147	392	66	A8/B	3350/3075	23	5251	797
	1947038580	580/70 R38	TL	580	1830	155/152	469	69	A8/B	3875/3550	23	5477	829
	1947030600	600/70 R30	TL	595	1650	158/156	414	67	A8/B	4250/4000	35	4777	718
	1947038710	710/70 R38	TL	720	1965	171/174	715	72	D/A8	6150/6700	35	5859	883
	1947042710	710/70 R42	TL	720	2061	173/176	774	72	D/A8	6500/7100	35	6162	931

80 SERIES	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
	mm	mm	kg	psi	mm	mm							
	1948042480	480/80 R42	TL	485	1845	151/148	416	66	A8/B	3450/3150	23	5552	845
	1948046480	480/80 R46	TL	485	1945	164/164	436	66	A8/B	5000/5000	46	5866	895
85 SERIES	1948524250	250/85 R24 (9.5 R24)	TL	251	1036	109/106	86	44	A8/B	1030/1030	23	3121	475
	1948528250	250/85 R28 (9.5 R28)	TL	251	1137	112/112	93	44	A8/B	1120/1120	23	3406	516
	1948520280	280/85 R20 (11.2 R20)	TL	282	984	112/109	87	43	A8/B	1130/1030	23	2942	444
	1948524280	280/85 R24 (11.2 R24)	TL	282	1086	115/112	98	49	A8/B	1215/1120	23	3262	495
	1948528280	280/85 R28 (11.2 R28)	TL	282	1187	118/115	113	49	A8/B	1320/1215	23	3580	546
	1948520320	320/85 R20 (12.4 R20)	TL	319	1052	119/116	107	44	A8/B	1360/1250	23	3134	472
	1948524320	320/85 R24 (12.4 R24)	TL	319	1154	122/119	130	49	A8/B	1500/1360	23	3454	523
	1948528320	320/85 R28 (12.4 R28)	TL	320	1255	124/121	147	52	A8/B	1600/1450	23	3772	573
	1948532320	320/85 R32 (12.4 R32)	TL	320	1365	126/126	161	53	A8/B	1700/1700	35	3883	554
	1948536320	320/85 R36 (12.4 R36)	TL	320	1465	128/125	178	52	A8/B	1800/1650	23	4429	677
	1948538320	320/85 R38 (12.4 R38)	TL	320	1515	143/143	192	52	A8/B	2725/2725	52	4587	703
	1948524340	340/85 R24 (13.6 R24)	TL	343	1188	125/122	151	54	A8/B	1650/1500	23	3551	536
	1948528340	340/85 R28 (13.6 R28)	TL	343	1289	127/124	162	53	A8/B	1750/1600	23	3868	587
	1948536340	340/85 R36 (13.6 R36)	TL	343	1495	132/129	196	54	A8/B	2000/1850	23	4514	689
	1948538340	340/85 R38 (13.6 R38)	TL	343	1545	133/130	201	54	A8/B	2060/1900	23	4672	715
	1948546340	340/85 R46 (13.6 R46)	TL	345	1756	150/153	228	50	D/A8	3350/3650	52	5332	819
	1948548340	340/85 R48 (13.6 R48)	TL	343	1800	151/154	255	52	D/A8	3450/3750	58	5472	842
	1948524380	380/85 R24 (14.9 R24)	TL	380	1256	131/128	178	55	A8/B	1950/1850	23	3743	563
	1948528380	380/85 R28 (14.9 R28)	TL	380	1357	133/130	192	55	A8/B	2060/1900	23	4060	614
	1948530380	380/85 R30 (14.9 R30)	TL	380	1408	135/132	201	55	A8/B	2180/2000	23	4220	639
	1948538380	380/85 R38 (14.9 R38)	TL	380	1611	139/136	238	55	A8/B	2430/2220	23	4858	741
	1948524420	420/85 R24 (16.9 R24)	TL	418	1324	137/134	218	54	A8/B	2300/2120	23	3935	591
	1948528420	420/85 R28 (16.9 R28)	TL	418	1425	139/136	237	58	A8/B	2430/2240	23	4253	641
	1948530420	420/85 R30 (16.9 R30)	TL	418	1476	140/137	252	60	A8/B	2500/2300	23	4413	667
	1948534420	420/85 R34 (16.9 R34)	TL	418	1578	142/138	265	60	A8/B	2650/2360	23	4733	718
	1948538420	420/85 R38 (16.9 R38)	TL	418	1679	144/141	295	60	A8/B	2800/2575	23	5050	768
	1948530460	460/85 R30 (18.4 R30)	TL	455	1544	145/142	285	66	A8/B	2900/2650	23	4605	694
	1948534460	460/85 R34 (18.4 R34)	TL	455	1646	147/144	312	66	A8/B	3075/2800	23	4925	745
	1941046038	460/85 R38 (18.4 R38)	TL	455	1747	149/146	347	66	A8/B	3250/3000	23	5243	795
	1948538460	460/85 R38'	TL	455	1747	149/146	360	66	A8/B	3250/3000	23	5243	795
	1948538520	520/85 R38 (20.8 R38)	TL	516	1849	155/152	457	69	A8/B	3875/3550	23	5531	836
	1948520839	520/85 R38'	TL	516	1849	169	473	69	A8	5800	23	5531	836
	1948542520	520/85 R42 (20.8 R42)	TL	516	1955	157/157	481	71	A8/B	4125/4125	23	5863	889
	1948520842	520/85 R42'	TL	516	1955	167	515	71	A8	5450	23	5863	889
	1948538650	650/85 R38	TL	650	2071	173/176	756	72	D/A8	6500/7100	35	6159	925
*Reinforced for Harvester													
90 SERIES	1949046320	320/90 R46	TL	320	1750	145/148	222	52	D/A8	2900/3150	46	5315	817
	1949050320	320/90 R50	TL	320	1850	150/150	259	52	A8/B	3350/3350	52	5630	867
	1949054320	320/90 R54	TL	320	1950	155/155	289	52	A8/B	3875/3875	58	5944	917
	1949046380	380/90 R46	TL	380	1860	159/162	317	57	D/A8	4375/4750	58	5626	861
95 SERIES	1940020095	9.5 R20	TL	241	938	108/105	76	42	A8/B	1000/925	23	2652	375
	1949532210	210/95 R32	TL	215	1215	116/120	86	39	D/A8	1250/1400	35	3691	567
	1949536210	210/95 R36	TL	215	1320	118/121	105	39	D/A8	1800/1950	58	4019	619
	1949544210	210/95 R44	TL	215	1520	126/129	122	40	D/A8	1700/1850	35	4649	720
	1949532230	230/95 R32	TL	230	1255	128/131	103	40	D/A8	1800/1950	58	3804	583
	1949536230	230/95 R36	TL	230	1355	130/133	116	39	D/A8	1900/2060	58	4118	633
	1949542230	230/95 R42	TL	230	1505	133/136	132	40	D/A8	2060/2240	58	4590	709
	1949544230	230/95 R44	TL	230	1560	134/137	130	42	D/A8	2120/2300	58	4762	736
	1949548230	230/95 R48	TL	230	1660	136/139	143	45	D/A8	2240/2430	58	5077	786
	1949532270	270/95 R32	TL	275	1330	133/136	131	49	D/A8	2060/2240	58	4016	613
	1949536270	270/95 R36	TL	275	1435	136/139	147	48	D/A8	2240/2430	58	4329	665
	1949538270	270/95 R38	TL	275	1485	137/140	154	50	D/A8	2300/2500	58	4502	691
	1949542270	270/95 R42	TL	275	1581	141/138	169	49	A8/B	2575/2360	58	4788	737
	1949544270	270/95 R44	TL	275	1635	142/145	166	50	D/A8	2650/2900	58	4974	766
	1949546270	270/95 R46	TL	275	1685	141/144	175	50	D/A8	2575/2800	58	5131	791
	1949548270	270/95 R48	TL	275	1735	142/145	183	50	D/A8	2650/2900	58	5289	816
	1949554270	270/95 R54	TL	275	1885	146/149	208	50	D/A8	3000/3250	58	5761	891
	1949546300	300/95 R46	TL	300	1740	148/151	210	50	D/A8	3150/3450	58	5287	813
	1949552300	300/95 R52	TL	300	1900	156/159	233	50	D/A8	4000/4375	58	5787	892

*Reinforced for Harvester



AGRÖ11 | RADIAL TRACTOR TIRES

- Comfortable drive due to flexible sidewall structure
- Mud repellent features due to the specially designed tread pattern and void area design
- High performance due to deep treads and wide footprint

70 SERIES	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1947042620	620/70 R42	TL	625	1935	166/166	589	68	A8/B	5300/5300	35	5806	881
75 SERIES	1947526620	620/75 R26	TL	630	1600	166/166	511	69	A8/B	5300/5300	46	4731	706
	1947530620	620/75 R30	TL	630	1695	163/161	539	71	A8/B	4875/4625	35	5032	754
	1947532650	650/75 R32	TL	650	1795	172/172	586	69	A8/B	6300/6300	46	5331	799



AGRIGOR20 | RADIAL FLOTATION TIRES

- Ideal for all terrain conditions with its reinforced bead design
- Low soil compaction and flatter footprint
- Self cleaning non-directional tread pattern
- Strengthened casing construction for resistance to impacts

45 SERIES	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944522560	560/45 R22.5	TL	564	1076	152	208	37	D	3550	58	3222	488
50 SERIES	1945022600	600/50 R22.5	TL	591	1172	159	247	37	D	4375	58	3493	526
60 SERIES	1946022500	500/60 R22.5	TL	490	1140	155	202	37	D	3875	58	3403	513

THE ART OF HIGH TRACTION

Experience the high traction with special design of Özka Tires.





AGRIGOR20  **NTR**

THE ART OF ENGINEERING


Bringing the power of nature and technology together, AGRIGOR20 NTR sets a new standard in agricultural tires. Enhanced with lavender oil, AGRIGOR20 NTR does not only deliver exceptional performance but also stands out with its unique lavender scent.



AGROLOX-S

THE ART OF SUSTAINABILITY

AGROLOX-S stands out as an innovative solution offering sustainability and high performance to the agricultural tire sector. Made with 55% recyclable materials, AGROLOX-S adapts to tough conditions while providing farmers with long-lasting durability.

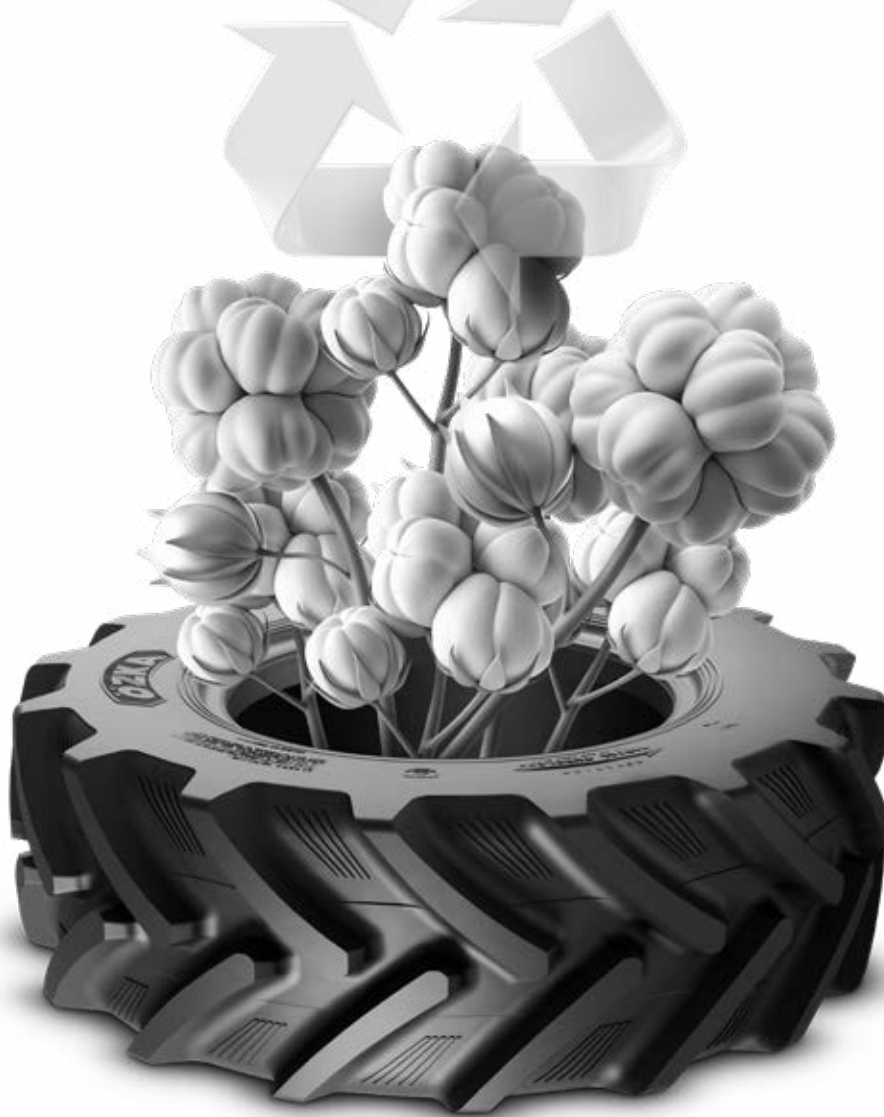



KNK30 | FRONT TRACTOR TIRES

- Tractor front tire for general use
- Strengthened casing construction for resistance to impacts
- Smooth driving with gutters at central back
- Shoulder tread designed for extra traction
- Excellent performance in soil and on hard surfaces

KNK30	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1943162011	6.00-16 6PR	TT	165	735	88	22	19	A6	560	48	2206	335
	1943162021	6.00-16 8PR	TT	165	735	93	22	19	A6	650	48	2206	335
	1943163011	6.50-16 6PR	TT	175	760	91	28	18	A6	615	45	2277	345
	1943163021	6.50-16 8PR	TT	175	760	97	28	18	A6	730	54	2277	345
	1943164011	7.50-16 6PR	TT	205	805	98	31	20	A6	750	41	2404	363
	1943164021	7.50-16 8PR	TT	205	805	103	31	20	A6	875	54	2404	363



KNK32 | FRONT TRACTOR TIRES

- Long lasting front tractor tire
- Non-directional tread pattern for high maneuverability
- Increased tread depth for more puncture resistance

KNK32	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1943164111	7.50-16 6PR	TT	205	805	98	31	20	A6	750	41	2404	363
	1943164121	7.50-16 8PR	TT	205	805	103	31	20	A6	875	54	2404	363
	1943181021	7.50-18 8PR	TT	205	860	106	39	20	A6	950	54	2575	390
	1943201021	6.50-20 8PR	TT	175	865	102	33	18	A6	850	54	2605	397
	1943202021	7.50-20 8PR	TT	205	915	108	41	20	A6	1000	49	2747	417



KNK33 | FRONT TRACTOR TIRES

- Increased tread depth for more puncture resistance
- Comfortable ride in the field and on the road
- Clean out features by design

KNK33A	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1943162111	6.00-16 6PR	TT	165	735	88	22	19	A6	560	48	2206	335
	1943162121	6.00-16 8PR	TT	165	735	93	22	19	A6	650	48	2206	335
	1943163111	6.50-16 6PR	TT	175	760	91	28	23	A6	615	45	2277	345
	1943163121	6.50-16 8PR	TT	175	760	97	28	23	A6	730	54	2277	345
	1943164211	7.50-16 6PR	TT	205	805	98	31	20	A6	750	41	2404	363
	1943164221	7.50-16 8PR	TT	205	805	103	31	20	A6	875	54	2404	363
	1943191011	6.00-19 6PR	TT	165	814	93	24	19	A6	650	48	2453	374



KNK35 | FRONT TRACTOR TIRES

- Designed for hard surface and field usage
- Non-directional tread pattern for high maneuverability
- Puncture resistant features
- Straight pattern design to hold true in field applications

KNK35	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1943161011	5.50-16 6PR	TT	150	710	86	22	8	A6	530	54	2135	325
	1943162211	6.00-16 6PR	TT	165	735	88	22	20	A6	560	48	2206	335
	1943162221	6.00-16 8PR	TT	165	735	93	22	20	A6	650	48	2206	335
	1943163211	6.50-16 6PR	TT	175	760	91	28	20	A6	615	45	2277	345
	1943163221	6.50-16 8PR	TT	175	760	97	28	20	A6	730	54	2277	345
	1943164311	7.50-16 6PR	TT	205	805	98	31	20	A6	750	41	2404	363
	1943164321	7.50-16 8PR	TT	205	805	103	31	20	A6	875	54	2404	363
	1943166021	9.00-16 8PR	TT	234	855	111	54	30	A6	1090	45	2545	383
	1943167021	10.00-16 8PR	TT	274	895	115	57	30	A6	1215	41	2658	399
	1943168021	11.00-16 8PR	TT	315	965	118	70	30	A6	1320	36	2856	427
	1943181221	7.50-18 8PR	TT	205	860	106	39	23	A6	950	54	2575	390



KNK50 | FRONT TRACTOR TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK50	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1943151021	7.50-15 8PR	TT	205	780	99	30	28	A6	775	52	2325	350
	1943162311	6.00-16 6PR	TT	165	735	88	22	25	A6	560	48	2206	335
	1943162321	6.00-16 8PR	TT	165	735	93	22	25	A6	650	48	2206	335
	1943163311	6.50-16 6PR	TT	175	760	91	28	26	A6	615	45	2277	345
	1943163321	6.50-16 8PR	TT	175	760	97	28	26	A6	730	54	2277	345
	1943164421	7.50-16 8PR	TT	205	805	103	31	28	A6	875	54	2404	363
	1943181421	7.50-18 8PR	TT	205	860	106	35	28	A6	950	54	2575	390
	1943202121	7.50-20 8PR	TT	205	915	108	40	28	A6	1000	49	2747	417
	1943203011	9.5-20 6PR	TT	241	940	101	46	35	A6	825	30	2817	427
	1943203021	9.5-20 8PR	TT	241	940	106	47	35	A6	950	35	2817	427
	1943203022	9.5-20 8PR	TL	241	940	106	59	35	A6	950	35	2817	427
	1943204021	11.2-20 8PR	TT	285	1005	113	61	42	A6	1150	38	3001	453
	1943204022	11.2-20 8PR	TL	285	1005	113	73	42	A6	1150	38	3001	453



KNK50 | REAR TRACTOR TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK50	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1945241011	8.3-24 6PR	TT	210	1009	105	46	31	A6	925	30	3044	465
	1945241021	8.3-24 8PR	TT	210	1009	108	46	31	A6	1000	35	3044	465
	1945242011	9.50-24 6PR	TT	241	1050	110	59	39	A6	1060	26	3160	481
	1945242021	9.50-24 8PR	TT	241	1050	116	60	39	A6	1250	34	3160	481
	1945243011	11.2-24 6PR	TT	284	1105	110	72	44	A6	1060	26	3316	503
	1945243021	11.2-24 8PR	TT	284	1105	116	73	44	A6	1250	34	3316	503
	1945243041	11.2-24 12PR	TT	284	1105	122	80	44	A6	1500	40	3316	503
	1945244011	12.4-24 6PR	TT	315	1160	115	88	44	A6	1215	24	3471	525
	1945244021	12.4-24 8PR	TT	315	1160	118	88	44	A6	1320	29	3471	525
	1945244041	12.4-24 12PR	TT	315	1160	124	99	44	A6	1600	35	3471	525
	1945245011	13.6-24 6PR	TT	345	1210	120	98	45	A6	1400	22	3613	545
	1945245021	13.6-24 8PR	TT	345	1210	123	99	45	A6	1550	28	3613	545
	1945245041	13.6-24 12PR	TT	345	1210	129	109	45	A6	1850	34	3613	545
	1945246011	14.9-24 6PR	TT	378	1265	125	111	44	A6	1650	20	3768	567
	1945246021	14.9-24 8PR	TT	378	1265	128	112	44	A6	1800	26	3768	567
	1945246031	14.9-24 10PR	TT	378	1265	131	119	44	A6	1950	30	3768	567
	1945246051	14.9-24 14PR	TT	378	1265	137	130	44	A6	2300	38	3768	567
	1945248021	16.9-24 8PR	TT	429	1335	133	153	44	A6	2060	25	3966	595
	1945248021	16.9-24 10PR	TT	429	1335	136	145	44	A6	2240	29	3966	595
	1945248031	16.9-24 14PR	TT	429	1335	141	146	44	A6	2575	35	3966	595
	1945247042	15.5/80-24 12PR	TL	394	1260	157	145	44	A6	4125	44	3754	565
	1945247062	15.5/80-24 16PR	TL	394	1260	163	154	44	A6	4875	58	3754	565
	1945261031	14.9-26 10PR	TT	378	1315	133	130	45	A6	2060	30	3926	592
	1945262031	18.4-26 10PR	TT	467	1461	142	186	47	A6	2650	26	4338	650
	1945262061	18.4-26 16PR	TT	467	1461	153	201	47	A6	3650	44	4338	650
	1945261051	14.9-26 14PR	TT	378	1315	140	141	45	A6	2500	39	3926	592
	1945281011	11.2-28 6PR	TT	284	1205	112	91	45	A6	1120	26	3630	553
	1945281021	11.2-28 8PR	TT	284	1205	118	91	45	A6	1320	34	3630	553
	1945282011	12.4-28 6PR	TT	315	1260	117	103	43	A6	1285	25	3786	575
	1945282021	12.4-28 8PR	TT	315	1260	125	104	43	A6	1650	30	3786	575
	1945283011	13.6-28 6PR	TT	345	1310	121	115	45	A6	1450	23	3927	595
	1945283021	13.6-28 8PR	TT	345	1310	125	125	45	A6	1650	29	3927	595

KNK50 | REAR TRACTOR TIRES

KNK50	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1945284011	14.9-28 6PR	TT	378	1365	125	126	45	A6	1650	20	4083	617
	1945284021	14.9-28 8PR	TT	378	1365	130	139	45	A6	1900	26	4083	617
	1945284051	14.9-28 14PR	TT	378	1365	143	150	45	A6	2725	40	4083	617
	1945284021	16.9-28 8PR	TT	429	1435	135	139	45	A6	2180	24	4281	645
	1945284031	16.9-28 10PR	TT	429	1435	139	138	45	A6	2430	29	4281	645
	1945284051	16.9-28 14PR	TT	429	1435	143	150	45	A6	2725	34	4281	645
	1945301021	14.9-30 8PR	TT	378	1415	132	147	47	A6	2000	26	4240	642
	1945301031	14.9-30 10PR	TT	378	1415	136	147	47	A6	2240	29	4240	642
	1945302021	16.9-30 8PR	TT	429	1485	137	172	48	A6	2300	25	4438	670
	1945302031	16.9-30 10PR	TT	429	1485	144	175	48	A6	2800	28	4438	670
	1945302051	16.9-30 14PR	TT	429	1485	150	187	48	A6	3350	34	4438	670
	1945303021	18.4-30 8PR	TT	467	1550	139	207	47	A6	2430	20	4622	696
	1945303031	18.4-30 10PR	TT	467	1550	145	210	47	A6	2900	26	4622	696
	1945303051	18.4-30 14PR	TT	467	1550	154	223	47	A6	3750	40	4622	696
	1945321021	8.3-32 8PR	TT	211	1195	111	59	38	A6	1090	46	3634	559
	1945322021	9.5-32 8PR	TT	241	1250	115	78	42	A6	1215	39	3790	581
	1945323021	12.4-32 8PR	TT	315	1360	125	114	44	A6	1650	32	4101	625
	1945341031	16.9-34 10PR	TT	429	1585	142	185	47	A6	2650	29	4753	720
	1945341051	16.9-34 14PR	TT	429	1585	148	198	47	A6	3150	37	4753	720
	1945342031	18.4-34 10PR	TT	467	1650	146	220	47	A6	3000	26	4937	746
	1945342051	18.4-34 14PR	TT	467	1650	153	236	47	A6	3650	36	4937	746
	1945361011	12.4-36 6PR	TT	315	1465	121	127	44	A6	1450	24	4429	677
	1945361021	12.4-36 8PR	TT	315	1465	126	138	44	A6	1700	29	4429	677
	1945362011	13.6-36 6PR	TT	345	1515	125	144	44	A6	1650	23	4571	697
	1945362021	13.6-36 8PR	TT	345	1515	129	157	44	A6	1850	29	4571	697
	1945381021	12.4-38 8PR	TT	315	1515	127	148	44	A6	1750	29	4587	703
	1945382011	13.6-38 6PR	TT	345	1565	126	161	45	A6	1700	23	4728	723
	1945382021	13.6-38 8PR	TT	345	1565	131	167	45	A6	1950	29	4728	723
	1945382031	13.6-38 10PR	TT	345	1565	135	167	45	A6	2180	33	4728	723
	1945383021	14.00-38 8PR	TT	345	1565	131	167	45	A6	1950	29	4728	723
	1945383031	14.00-38 10PR	TT	345	1565	135	167	45	A6	2180	33	4728	723
	1945384031	15.5-38 10PR	TT	394	1570	138	180	47	A6	2360	33	4742	725
	1945384041	15.5-38 12PR	TT	394	1570	141	182	47	A6	2575	38	4742	725
	1945385031	16.9-38 10PR	TT	429	1685	145	205	48	A6	2900	30	5067	771
	1945385051	16.9-38 14PR	TT	429	1685	152	222	48	A6	3550	40	5067	771
	1945386031	18.4-38 10PR	TT	467	1750	147	249	48	A6	3075	26	5251	797
	1945386051	18.4-38 14PR	TT	467	1750	154	267	48	A6	3750	36	5251	797



KNK53 | REAR TRACTOR TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK53	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1945302221	16.9-30 8PR	TT	429	1485	137	172	45	A6	2300	25	4438	670
	1945302231	16.9-30 10PR	TT	429	1485	144	175	45	A6	2800	28	4438	670
	1945302241	16.9-30 12PR	TT	429	1485	147	175	45	A6	3075	31	4438	670
	1945302251	16.9-30 14PR	TT	429	1485	150	187	45	A6	3350	34	4438	670
	1945384141	15.5-38 12PR	TT	394	1570	141	182	47	A6	2575	38	4742	725
	1945385131	16.9-38 10PR	TT	429	1685	145	205	48	A6	2900	30	5067	771





KNK55 | IRRIGATION TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK55	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1945243111	11.2-24 6PR ¹	TT	284	1105	110	65	35	A6	1060	26	3316	503
	1945243121	11.2-24 8PR ¹	TT	284	1105	116	66	35	A6	1250	34	3316	503
	1945246211	14.9-24 6PR ¹	TL	378	1265	123	102	35	A6	1550	20	3768	567
	1945246212	14.9-24 6PR ¹	TT	378	1265	123	129	35	A6	1550	20	3768	567
	1945246221	14.9-24 8PR ¹	TT	378	1265	127	107	35	A6	1750	26	3768	567
	1945380911	11.2-38 6PR ¹	TT	284	1450	117	112	39	A6	1285	19	4403	677
	1945380921	11.2-38 8PR ¹	TT	284	1450	122	101	39	A6	1500	26	4403	677

¹Irrigation



KNK36 | HARVESTER TIRES

- Lower rolling resistance due to five-rib design
- Suitable for both on and off-road applications
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Excellent flotation properties with high load capacity at low inflation pressure

KNK36	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1944203052	16.0/70-20 14PR	TL	418	1075	154	120	18	A6	3750	51	3099	438
	1944242032	9.00-24 10PR	TL	272	1094	124	70	10	B	1600	41	3285	499



KNK48 | HARVESTER TIRES

- Highway, agricultural, and off-road tire with high load carrying capacity
- Tread pattern designed for minimal rolling resistance
- Wide footprint allows for great flotation Increased tread depth for puncture resistance

KNK48	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1944181041	10.5/80-18 12PR	TT	274	885	135/123	55	15	A8	2180	65	2646	400
	1944182051	12.5/80-18 14PR	TT	308	965	144/131	72	15	A8	2800	62	2872	432
	1944183061	13.0/65-18 16PR	TT	336	890	144/131	67	16	A8	2800	71	2660	402



KNK50 | HARVESTER TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK50	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1945263072	23.1-26 18PR	TL	587	1605	162	410	55	A6	4750	37	4746	708
	1945303261	18.4-30 16PR	TT	467	1550	158	226	47	A6	4250	45	4622	696
	1945304072	23.1-30 18PR	TL	587	1715	160	443	55	A6	4500	36	5088	762
	1945342061	18.4-34 16PR	TT	467	1650	159	242	47	A6	4375	45	4937	746
	1945387061	20.8-38 16PR	TT	528	1840	162	370	55	A6	4750	39	5506	833
	1945387062	20.8-38 16PR	TL	528	1840	162	410	55	A6	4750	39	5506	833



KNK22 | FLOTATION TIRES

- Strengthened casing construction for resistance to impacts
- General purposed trailer tire
- Excellent performance in soil and on hard surfaces
- Mud-repellent and enhanced traction features

KNK22	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1944202051	9.00-20 14PR	TT	247	1017	133	78	23	A6	2060	81	3035	458



KNK25 | FLOTATION TIRES

- Strengthened casing construction for resistance to impacts
- General purpose trailer tire
- Excellent performance in soil and on hard surfaces
- Mud-repellent and enhanced traction features

KNK25	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1944161041	7.50-16 12PR	TT	214	787	121	45	20	A8	1450	72	2353	355
	1944201051	8.25-20 14PR	TT	234	970	133	69	23	A6	2060	90	2902	439



KNK26 | FLOTATION TIRES

- Strengthened casing construction for resistance to impacts
- General purpose trailer tire
- Excellent performance in soil and on hard surfaces
- Mud-repellent and enhanced traction features

KNK26	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944162041	9.00-16 12PR	TT	247	865	125	56	29	A6	1650	58	2573	387
	1944162051	9.00-16 14PR	TT	247	865	128	56	29	A6	1800	67	2573	387



KNK27 | FLOTATION TIRES

- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge due to guttered design
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability

KNK27	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944162141	9.00-16 12PR	TT	247	865	125	56	18	A6	1650	58	2573	387
	1944162151	9.00-16 14PR	TT	247	865	128	56	18	A6	1800	67	2573	387



KNK28 | FLOTATION TIRES

- Multi-use tread pattern design for soil and hard surfaces
- Durable side wall
- Traction features with angled shoulders and channels

KNK28	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1944161141	7.50-16 12PR	TT	214	787	121	39	19	A8	1450	72	2353	355



KNK42 | FLOTATION TIRES

- Wide base for less soil compaction and strong casing for high load carrying capacity
- Flotation tread for minimal disruption

KNK42	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1944153442	260/70-15.3 (10.0/75-15.3) 12PR	TL	268	753	126/114	34	11	A8	1700	52	2251	340
	1944153552	300/80-15.3 (11.5/80-15.3) 14PR	TL	295	869	141/129	55	11	A8	2575	58	2579	386



KNK46 | FLOTATION TIRES

- Soil tillage, transport and hay harvesting applications with implement machinery, railers and hay harvesters/balers
- Special tread compounding for exceptional cut resistance and uniform wear on all types of terrains

KNK46	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944173052	500/50-17 14PR	TL	503	932	149	119	15	A8	3250	41	2771	416
	1944173072	500/50-17 18PR	TL	503	932	157	125	15	A8	4125	70	2771	416



KNK48 | FLOTATION TIRES

- Highway, agricultural and off-road tire with high load carrying capacity
- Channels designed for minimal rolling resistance
- Wide footprint allows for great flotation
- Increased tread depth for puncture resistance

KNK48	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944151042	10.0/75-15.3 (260/70-15.3) 12PR	TL	264	760	126/114	46	15	A8	1700	68	2271	343
	1944151052	10.0/75-15.3 (260/70-15.3) 14PR	TL	264	760	130/118	49	15	A8	1900	80	2271	343
	1944152052	11.5/80-15.3 (300/80-15.3) 14PR	TL	290	845	139/126	67	15	A8	2430	69	2511	377
	1944153152	12.5/80-15.3 (320/80-15.3) 14PR	TL	307	889	142/129	68	15	A8	2650	62	2636	394
	1944163041	10.5/65-16 (265/65-16) 12PR	TT	274	755	126/114	42	15	A8	1700	65	2262	343



KNK52 | FLOTATION TIRES

- High load carrying capacity off-road and agricultural tire
- High traction pattern in both wet and dry conditions

KNK52	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944151142	10.0/75-15.3 12PR	TL	264	760	126/114	48	26	A8	1700	68	2271	343
	1944152152	11.5/80-15.3 14PR	TL	290	845	139/126	60	28	A8	2430	69	2511	377



KNK56 | FLOTATION TIRES

- Extra-strong casing construction
- Flexibility and deep tread profile

KNK56	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944153362	12.5/80-15.3 16PR	TL	307	889	144/131	80	23	A8	2800	71	2636	394
	1944153672	400/60-15.5 18PR	TL	404	874	151/139	91	24	A8	3450	90	2595	389
	1944221062	550/60-22.5 16PR	TL	543	1244	167/163	209	31	A8/B	3750	41	3697	555



KNK41 | IMPLEMENT TIRES

NEW
PATTERN

- Resistant to impacts and cuts thanks to the use of high quality compound
- Less soil compaction with large footprint
- Thanks to its special design, less tire rolling resistance and fuel consumption

KNK41	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1944154122	9.5L-15 SL 8PR	TL	240	770	112	34	#VALUE!	B	1120	44	2418	350
	1944154222	11L-15 SL 8PR	TL	280	775	113	36	#VALUE!	B	1150	36	2434	352
	1944154342	12.5L-15 SL 12PR	TL	315	825	127	45	#VALUE!	B	1750	52	2591	372



KNK42 | IMPLEMENT TIRES

- Low rolling resistance
- High comfort
- Pattern designed to prevent skidding
- Low soil compaction and flatter footprint

KNK42	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1941124032	10.0/80-12 10PR	TL	261	671	116	33	10	A8	1250	57	1993	299



KNK48 | IMPLEMENT TIRES

- High tread depth
- Low rolling resistance
- High comfort
- Low soil compaction and flatter footprint

KNK48	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1941124132	10.0/80-12 10PR	TL	264	710	116	40	14	A8	1250	57	2103	314



KNK50 | IMPLEMENT TIRES

- High traction
- Designed to prevent mud and soil build-up during movement
- Windowed blocks to facilitate release of mud

KNK50	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1941152011	6.50/80-15 6PR	TT	163	663	96	17	24	A6	710	52	1994	303



KNK52 | IMPLEMENT TIRES

- High load carrying capacity off-road and agricultural tire
- High traction pattern in both wet and dry conditions

KNK52	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1941121001	5.00-12 4PR	TT	145	580	62	14	20	A6	265	32	1736	262
	1941123011	7.00-12 6PR	TT	200	683	83	25	25	A6	485	36	2027	304
	1941131011	6.50/80-13 6PR	TT	170	640	82	18	23	A6	475	52	1913	289



KNK54 | IMPLEMENT TIRES

- High traction provided by its angled blocks
- Designed to prevent mud and soil build-up during field operations thanks to its open and overlapping center design
- Windowed blocks to facilitate release of mud

KNK54	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1941122011	6.50/80-12 6PR	TT	163	588	80	15	23	A6	450	52	1758	266



KNK140 | IMPLEMENT TIRES

- For use in farm and garden applications
- Strong and robust construction
- Pattern designed to prevent skidding

KNK140	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1941151011	5.00-15 6PR	TT	145	655	76	14	19	A6	400	50	1972	300



FRS40 | FORESTRY TIRES

- Specially designed for forestry application
- Special tread and sidewall compounding provides maximum tire life, resistance to cuts and cracks
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tire against deep impacts.

FRS40	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1945262262	18.4-26 16PR	TL	467	1461	153	245	48	A6	3650	44	4338	650



THE ART OF CUSTOMER SATISFACTION

Move forward your work with Özka's on-time delivery and fast solutions.

INDUSTRIAL, EM, OTR TIRES

ORMER X30	STEXOR40	OR71	KNK44
KNK65	KNK66	IND80	KNK12
IND85	IND88	KNK70	KNK72
KNK74	KNK77	KNK88	KNK40
SOLIFT			









ORMER X30 | ALL STEEL RADIAL TIRES

NEW
PATTERN

- Suitable for a broad variety of applications
- High load capacity
- Cut and heat resistant tread compounds

FORMER X30	Tire Info						Rim	Technical Information										Inflated Unloaded Dimension	
	Product Code	Tire Size	Star Rating	TT/TL	LI/SI	TRA Code	Rec. Rim (inch)	Speed (km/h)	Inflation Pressure (Bar/psi)	Tread Depth 32nds	Weight lbs	Load Capacity (kg)					Overall Diameter (mm)	Section Width (mm)	
												3.5 Bar / 51 Psi	4.0 Bar / 58 Psi	4.5 Bar / 65 Psi	5.0 Bar / 73 Psi	5.75 Bar / 83 Psi			
	*NEW TIRE	20.5 R25	**	TL	193 A2 / 177 B	L3 / E3	17.00/2.0	10 km / h	-	-	8450	9200	9950	10700	11500	1492	520		
								50 km / h	-	-	6000	6700	7300	-	-				
	*NEW TIRE	23.5 R25	**	TL	201 A2 / 185 B	L3 / E3	19.50/2.5	10 km / h	-	-	10650	11750	12750	13600	14500	1617	597		
								50 km / h	-	-	7500	8500	9250	-	-				
*NEW TIRE	26.5 R25	**	TL	209 A2 / 193 B	L3 / E3	22.00/3.0	10 km / h	-	-	13600	15000	16150	17350	18500	1750	673			
							50 km / h	-	-	9500	10500	11500	-	-					

* The marked product will be launched during 2025.

ÖZKA



STEXOR40 | RADIAL EM TIRES

NEW
PATTERN

- High traction tread design
- Exceptional wear resistance
- Increased load capacity - steel belted radial
- Balanced and comfortable ride
- Superior durability

**STEEL
BELTED**

INDUSTRIAL, EM, OTR TIRES

STEXOR40	Tire Info							Rim	Inflated Unloaded Dimension		Loaded Static Radius (mm)	Rolling Circumference (mm)	Inflation Pressure (psi)	Load Capacity (kg) *				
	Product Code	Tire Size	TT/TL	LI / SI	TRA Code	Weight lbs	Tread Depth 32nds	Rec. Rim (inch)	Overall Diameter (mm)	Section Width (mm)				10 km/h	25 km/h	30 km/h	40 km/h **	50 km/h **
	*NEW TIRE	400/70 R20	TL	149 A8/B	R-4	-	-	13	1068	404	480	3194	58	4065	3610	3480	3250	3250
	*NEW TIRE	405/70 R20	TL	149 A8/B	R-4	-	-	13	1070	414	480	3200	58	4065	3610	3480	3250	3250
	*NEW TIRE	460/70 R24 (17.5LR24)	TL	159 A8/B	R-4	-	-	DW15L	1251	453	562	3740	58	5470	4855	4680	4375	4375

* The marked product will be launched during 2025.

* Please contact the manufacturer for load carrying capacity at different speeds ** Carrying capacity at standard speed and standard load

ÖZKA



OR71 | RADIAL EM TIRES

- High traction and comfort
- Longer service life
- Comfortable drive due to flexible sidewall structure
- Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks
- Strong tread compound for cut-resistance
- High performance due to wide a footprint
- Mud repellent features due to a specially designed tread pattern

70 SERIES	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi	mm	mm
	1947024461	460/70 R24	TL	455	1255	159/159	227	45	A8/B	R-4	4375/4375	58	3740	563
	1947024500	500/70 R24	TL	503	1310	164/164	243	#VALUE!	A8/B	R-4	5000	58	4113	592
80 SERIES	1948024440	440/80 R24	TL	450	1320	154/154	241	50	A8/B	R-4	3750/3750	46	3924	589
	1948028440	440/80 R28	TL	450	1420	156/156	264	50	A8/B	R-4	4000/4000	46	4238	639



KNK44 | EM / INDUSTRIAL TIRES

- Resistance to stone cuts, cracks and breaks
- Long wear-life

KNK44	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946202061	10.00-20 16PR	TT	283	1084	146 / 143	105	30	B	3000	109	3225	484
1946202062	10.00-20 16PR	TL	283	1084	146 / 143	111	30	B	3000	109	3225	484	



KNK65 | EM / INDUSTRIAL TIRES

- Long wear-life
- Cracking / fatigue resistance built in to the tread
- Excellent traction
- Increased sidewall protection and rim-protecting features

KNK65	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946161042	10-16.5 12PR	TL	282	775	138	64	38	A3	2360	84	2323	352
	1946162052	12-16.5 14PR	TL	320	846	148	93	43	A3	3150	90	2524	380



KNK66 | EM / INDUSTRIAL TIRES

- High traction and comfort
- Designed for challenging applications
- Excellent maneuverability in high load applications due to the reinforced shoulder blocks
- Comfortable drive due to flexible sidewall structure
- Reinforced casing structure
- Wear resistance due to special tread compounds
- Increased sidewall protection and rim-protecting features

KNK66	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946161142	10-16.5 12PR	TL	282	775	138	64	38	A3	2360	84	2323	352
	1946162152	12-16.5 14PR	TL	320	846	148	93	42	A3	3150	90	2524	380
	1946182052	12.5/80-18 14PR	TL	305	983	146	114	42	A8	3000	62	2923	439



IND80 | EM / INDUSTRIAL TIRES

- High traction and excellent self-cleaning features thanks to deep and corrugated tread structures
- Resistance to stone cuts, cracks, and breaks
- Higher wear and puncture resistance thanks to reinforced center-bar construction
- Impact resistant tread compounds
- Long wear-life

IND80	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi	mm	mm
	1946161242	10-16.5 12PR	TL	256	793	138	52	23	A3	R-4	2360	84	2374	359
	1946162252	12-16.5 14PR	TL	297	858	148	68	25	A3	R-4	3150	90	2558	385
	1946181042	10.5/80-18 12PR	TL	271	892	135	65	26	A8	R-4	2180	62	2666	403
	1946182152	12.5/80-18 14PR	TL	285	955	146	98	35	A8	R-4	3000	62	2844	428
	1946207162	16.0/70-20 16PR	TL	385	1091	166	149	38	A2	R-4	5300	65	3244	487
	1946207062	405/70-20 16PR	TL	385	1091	166	149	38	A2	R-4	5300	65	3244	487
	1946243062	15.5/80-24 16PR	TL	412	1269	162	169	44	A8	R-4	4750	72	3780	569
	1946245162	16.0/70-24 16PR	TL	418	1200	169	176	40	A2	R-4	5800	65	3584	541
	1946245062	405/70-24 16PR	TL	418	1200	169	176	40	A2	R-4	5800	65	3584	541
	1946246062	16.9-24 16PR	TL	429	1310	154	199	39	A8	R-4	3750	46	3895	585
	1946246162	440/80-24 16PR	TL	429	1310	154	199	39	A8	R-4	3750	46	3895	585
	1946247052	17.5L-24 14PR	TL	475	1277	154	170	33	A8	R-4	3750	46	3802	572
	1946248052	19.5L-24 14PR	TL	495	1314	154	228	37	A8	R-4	3750	38	3907	587
	1946251052	15.5-25 14PR	TL	400	1286	173	188	33	A2	R-4	6500	68	3836	578
	1946261052	18.4-26 14PR	TL	467	1425	160	234	35	A8	R-4	4500	42	4237	636
	1946281052	16.9-28 14PR	TL	429	1410	156	206	35	A8	R-4	4000	43	4210	635
	1946281152	440/80-28 14PR	TL	429	1410	156	206	35	A8	R-4	4000	43	4210	635
	1946301062	16.9-30 16PR	TL	418	1466	156	221	35	A8	R-4	4000	47	4384	663

ÖZKA



KNK12 | EM / INDUSTRIAL TIRES

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature

KNK12	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946204152	12.5-20 14PR	TL	325	1040	137	105	25	A8	2300	51	3100	467



IND85 | EM / INDUSTRIAL TIRES

- High traction comfort
- Resistance to stone cuts, cracks, and breaks
- Comfortable drive due to flexible sidewall structure
- Reinforced sidewall and bead design
- Longer life with its reinforced tread pattern
- Impact resistant tread compounds
- Long wear-life thanks to increased tread count and deeper tread depths

IND85	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi		
	1946182252	12.5/80-18 14PR	TL	304	965	146	105	34	A8	R-4	3000	62	2872	432



IND88 | EM / INDUSTRIAL TIRES

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction pattern design at the center lug
- Reinforced bead construction

IND88	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi		
	1946182352	12.5/80-18 14PR	TL	308	987	146	98	35	A8	R-4	3000	62	2934	441
	1946183052	340/80-18 14PR	TL	343	1001	146	101	35	A8	R-4	3000	62	2974	446
	1946207262	16.0/70-20 16PR	TL	385	1091	166	152	38	A2	R-4	5300	65	3244	487
	1946206052	14.5-20 14PR	TL	355	1095	143	122	36	D	R-4	2725	51	3256	489



KNK70 | EM / INDUSTRIAL TIRES

- Strong and durable design for severe applications
- Special rubber compounding that is resistant to wear
- Tread blocks built to withstand rougher than normal conditions
- Extra-reinforced center tread bar for extended life

KNK70	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi		
	1946242002	14.00-24 24PR	TL	375	1360	186	247	31	A2	E-3 L-3	9500	123	4037	605
	1946242042	14.00-24 32PR	TL	375	1360	190	279	31	A2	E-3 L-3	10600	145	4037	605
	1946251062	15.5-25 16PR	TL	384	1261	175	226	31	A2	E-3 L-3	6900	72	3765	568
	1946252082	17.5-25 20PR	TL	455	1371	181	299	38	A2	E-3 L-3	8250	83	4076	612
	1946254002	20.5-25 24PR	TL	531	1527	189	478	44	A2	E-3 L-3	10300	76	4517	674
	1946255002	23.5-25 24PR	TL	604	1625	196	644	44	A2	E-3 L-3	12500	68	4794	714
	1946256022	26.5-25 28PR	TL	702	1785	203	965	76	A2	E-4 L-4	15500	68	5246	778
	1946256042	26.5-25 32PR	TL	702	1785	206	961	76	A2	E-4 L-4	17000	79	5246	778
	1946257042	29.5-25 32PR	TL	758	1923	210	1208	76	A2	E-4 L-4	19000	72	5637	833



KNK72 | EM / INDUSTRIAL TIRES

- High traction and excellent self-cleaning features thanks to deep and corrugated tread structures
- Resistance to stone cuts, cracks, and breaks
- Higher wear and puncture resistance thanks to reinforced center-bar construction
- Impact resistant tread compounds
- Long wear-life

KNK72	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi		
	1946241062	13.00-24 16PR	TL	335	1280	151	156	29	A8	G2	3450	58	3811	573
	1946242062	14.00-24 16PR	TL	382	1354	153	194	31	A8	G2	3650	54	4020	603



KNK74 | EM / INDUSTRIAL TIRES

- Strong casing structure and tread construction
- Center tread bar for stability and wear
- Increased tread depth and high traction pattern provide optimum traction in muddy conditions

KNK74	Product Code	Tire Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter						Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm						kg	psi		
	1946244062	16.00-24 16PR	TL	432	1493	160	275	40	A8	G2	4500	47	4413	658



KNK77 | COMPACTOR TIRES

- Wide shoulder and wide footprint design
- Anti-wear futures and design appropriate for agricultural, industrial and off-road use
- Durable non-directional blocks
- Balanced traction and stability due to wide shoulders and tread blocks

KNK77	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946262052	23.1-26 14PR	TL	587	1580	166	320	35	A8	5300	33	4675	698



KNK88 | COMPACTOR TIRES

- Asphalt compaction design with a wide, flat tread profile
- Stable casing and bead construction with reinforced sidewalls

KNK88	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
	1946201041	9.00-20 12PR	TT	256	1002	157	112	#VALUE!	A2	4125	94	2993	452
	1946203061	11.00-20 16PR	TT	290	1040	168	159	#VALUE!	A2	5600	107	3100	467



KNK40 | FORKLIFT TIRES

- High quality tread and carcass construction for increased tire life
- Balanced design for operator comfort and traction
- Impact resistant tread and sidewall

KNK40	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi		
				mm	mm					kg	psi		
	1946091041	6.00-9 12PR	TT	165	544	121	17	15	A5	1450	145	1610	240
	1946101041	6.50-10 12PR	TT	181	592	125	24	18	A5	1650	110	1754	262
	1946121051	7.00-12 14PR	TT	195	674	134	33	21	A5	2120	110	2001	300
	1946151051	8.15-15 (28X9-15) 14PR	TT	220	710	146	47	21	A5	3000	145	2127	322
	1946152071	8.25-15 18PR	TT	240	840	153	70	24	A5	3650	145	2495	374



SOLIFT | SOLID FORKLIFT TIRES

NEW
PATTERN

- Premium 3-stage solid resilient tire
- High traction
- High resistance to punctures and tears
- Tread structure designed for severe conditions
- Longer service-life
- Increased operator comfort

SOLIFT	Tire Information				Technical Information							
	Product Code	Tire Size	Recommended Rim	Bead Type	Overall Diameter	Section Width	Tread Depth	Weight	Forklift (Up to 25km/h)		Load Index	Speed Index
					mm	mm	32nds	lbs	Load Wheel	Steer Wheel		
					mm	mm	32nds	lbs	kg	kg	LI	SI
					mm	mm	32nds	lbs	kg	kg	LI	SI
	1947081010	18x7-8	4.33R-8	Quick Lip	452	160	-	-	2145	1650	125	A5
	1947101010	200/50-10	6.50F-10	Quick Lip	457	193	-	-	2470	1900	130	A5
	1947102010	23x9-10 (225/75-10)	6.50F-10	Quick Lip	583	198	-	-	3445	2650	142	A5
	1947151010	8.15-15 (28x9-15)	7.0-15	Quick Lip	689	212	-	-	3445	2650	142	A5
	*NEW TIRE	6.50-10	5.00F - 10	Quick Lip	576	165	-	-	2340	1800	128	A5
	*NEW TIRE	6.00-9	4.00E - 9	Quick Lip	528	150	-	-	1885	1450	121	A5
	*NEW TIRE	7.00-12	5.00S - 12	Quick Lip	657	175	-	-	2920	2240	136	A5

*The marked product will be launched during 2025.

THE ART OF CHALLENGING CONDITIONS

Struggle against hard conditions with Özka Tires,
characterized by robust structure and exceptional impact resistance.





LCV TIRES

KNK20 KNK24
KNK25 KNK126











KNK20 | LIGHT TRUCK & MINIBUS TIRES

- Strong casing structure and high wear compounds
- Increased road stability and excellent traction
- Retreadable casing

KNK20	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1942141021	6.50-14 8PR	TT	171	647	97/95	26	13	L	730/690*	65	1918	287
	1942141031	6.50-14 10PR	TT	171	647	100/98	26	13	L	800/750*	72	1918	287
	1942151031	7.50-15 10PR	TT	235	789	114/112	39	18	L	1180/1120*	76	2318	344
	1942161031	6.50-16 10PR	TT	176	748	108/107	32	13	L	1000/975*	73	2216	331
	1942162031	7.00-16 10PR	TT	198	785	113/112	37	14	L	1150/1120*	76	2317	345
	1942163041	7.50-16 12PR	TT	210	810	121/120	40	14	L	1450/1400*	94	2386	335

*Load Capacity per tire on single axle with single Tire / Load capacity per tire on single axle with dual tires.



KNK24 | LIGHT TRUCK & MINIBUS TIRES

- Strong casing structure and high wear compounds
- Increased road stability and excellent traction
- Comfortable ride
- Retreadable casing

KNK24	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1942163141	7.50-16 12PR	TT	210	810	121/120	41	15	L	1450/1400*	94	2386	355

*Load Capacity per tire on single axle with single Tire / Load capacity per tire on single axle with dual tires.

KNK25 | LIGHT TRUCK & MINIBUS TIRES

- Optimum traction and braking performance tread design
- Strong casing structure and high wear compounds
Increased road stability and excellent traction
- Retreadable casing

KNK25	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1942163241	7.50-16 12PR	TT	210	810	121/120	45	20	L	1450/1400*	94	2386	355

*Load Capacity per tire on single axle with single Tire / Load capacity per tire on single axle with dual tires.

KNK126 | LIGHT TRUCK & MINIBUS TIRES

- Strong casing structure and high wear compounds
- Increased road stability and excellent traction
- Comfortable ride
- Retreadable casing

KNK126	Product Code	Tire Size	TT/TL	Inflated Unloaded Dimension		Load Index	Weight lbs	Tread Depth 32nds	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter					Tire Load Capacity	Tire Pressure At Max. Load		
				mm	mm					kg	psi	mm	mm
	1942161131	6.50-16 10PR	TT	176	748	108/107	32	16	L	1000/975*	73	2216	331
	1942162131	7.00-16 10PR	TT	198	785	113/112	37	18	L	1150/1120*	76	2317	345
	1942151131	7.50-15 10PR	TT	235	786	114/112	39	18	L	1180/1120*	76	2310	342
	1942163341	7.50-16 12PR	TT	210	810	121/120	43	18	L	1450/1400*	94	2386	355

*Load Capacity per tire on single axle with single Tire / Load capacity per tire on single axle with dual tires.

THE ART OF UNDERSTANDING THE GROUND

Experience Özka Tire performance that avoids soil compaction and holding mud thanks to its deep and wide tread structure.





LIMITED MANUFACTURER'S WARRANTY

Agricultural, Forestry, and Construction Tires

TO OBTAIN AN ADJUSTMENT

You must present the tire to be adjusted to a current Authorized CMA Dealer and allow for inspection. (Please consult your telephone directory for locations or visit our website for locations). Tires replaced on an adjustment basis become the property of CMA.

- You must pay for taxes, fees, or any additional services you order at the time of adjustment.
- No claim will be recognized unless submitted on a Özka claim form (supplied by the Authorized CMA Dealer), completely filled out and signed by you, the owner of the tire presented for adjustment, or your authorized agent.
- In addition to the Özka claim form and tire, you must submit: the invoice or receipt showing proof of purchase, a picture of the factory serial number, a picture showing the tread depth remaining (with a measurement instrument/tread depth gauge), two pictures of the defect or damage, and a picture of the entire tire.

FOR SERVICE ASSISTANCE OR INFORMATION

- First contact the nearest Authorized CMA Dealer.
- If additional assistance is required:
 - Visit our website at <https://www.OzkaTires.us/>; or
 - E-mail the Özka Customer Relations Department at info@cmaintl.com

WHO IS ELIGIBLE FOR WARRANTY COVERAGE

You are eligible for the benefits of this warranty if you meet all the following criteria:

- You are the owner or authorized agent of the owner of new CMA agricultural, forestry, or construction tires.
- Your tires were purchased from an Authorized CMA Dealer in the United States.
- Your tires bear the original and complete prescribed tire identification numbers and serial numbers and are not branded "NA" (Not Adjustable).
- Your Özka agricultural, forestry, or construction tires have been used only on the vehicle on which they were originally installed, and only in normal off-highway service in the United States, according to the vehicle manufacturer's or CMA's recommendations.
- Your tires were purchased on or after September 1, 2022.

WHAT THIS WARRANTY DOES NOT COVER

Failure, damage, or irregular wear due to:

- Road hazards (including punctures, cuts, snags, impact breaks, etc.);
- Wreck, collision, or fire;
- Improper inflation, overloading, high speed spin-up, misapplication, misuse, negligence, racing, chain or stud damage, improper mounting or demounting, improper repairs, or imbalance;
- Mechanical condition of the vehicle;
- Ride disturbance after the first 2/32" treadwear or due to damaged wheels or any vehicle condition;
- Any intentional alteration of the tire including tire appearance or its physical characteristics;
- Tire age, including conditions that age tires such as ozone or weather cracking, if the tire was manufactured five (5) or more years prior to presentation or is still serviceable; or
- The tire is branded or marked "Non-Adjustable" (N/A) OR "Blemished" (Blem), or previously adjusted;
- Accident or vandalism, improper misalignment, wheel imbalance, faulty shocks or brakes;
- Mechanical condition of vehicle, including misalignment, wheel imbalance, faulty shocks or brakes;
- Misapplication of tire, use of improper inner tube;
- Alteration of the tire or addition of alien material or transfer from one vehicle to another;

- Tire failure due to retreading or faulty material;
- Road hazards including but not limited to cuts, chips, rim slip, chunking, punctures, impact breaks;
- Rim slip, bead leakage due to undersized or deteriorated rims, chemical or petroleum damage, extreme temperature exposure, damaged rims/wheels or wheel/rim components, wheel misalignments, lug tearing or deterioration due to excessive cutting, broken or kinked beads;
- Tires damaged during shipping or transport by third-party carriers;
- Tires that have been in service longer than the warranty periods;
- Normal wear and tear or minor irregularities that do not affect the quality, performance or function of the tire;
- Neglect, abuse, or mistreatment;
- Loss of time or use, inconvenience, or any incidental or consequential damages; or
- Material added to a tire after leaving a factory producing Özka tires: (ex: tire fillers, sealants, balancing substances, liquid ballast, any internal ballast medium, or solid fill (such as urethane).
- This limited warranty is applicable only in the United States; any tire used or equipped on a vehicle registered or operated outside the U.S. is not covered by this warranty.
- Cost of mounting and balancing service except as otherwise noted herein.
- Claims of shortfalls in treadwear are not covered by this Warranty. Customer equipment, use, and the habits of the driver are outside the scope of this Policy.

DEFINITION OF A COMPARABLE TIRE

A "comparable" new Özka tire may either be the same line of tire or, in the event that the same tire is not available, a tire of the same basic construction and quality with a different sidewall or tread configuration. If a higher priced tire is accepted as replacement, the difference in price will be at an additional charge to you. Any replacement tire provided pursuant to this warranty will be covered by the warranty in effect at the time of replacement.

YOUR LEGAL RIGHTS

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply to you. No representative or dealer has authority to make any representation, promise, or agreement on behalf of CMA or Özka, except as stated herein. Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstances is this a representation that a tire failure cannot occur. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state. This limited warranty is applicable only in the United States. CMA reserves the right to the final inspection decision on conditions for all returned tires under this Limited Warranty and Adjustment Policy. This Limited Warranty and Adjustment Policy is made in lieu of all other warranties, express or implied, and CMA expressly disclaims all implied warranties, including but not limited to the warranties of merchantability or fitness for a particular purpose. Some U.S. states do not allow limitations on the duration of an implied warranty, so the above may not apply to you. To the extent permitted by law, CMA disclaims liability for all consequential, special, and incidental damages. The remedies set forth in this Limited Warranty and Adjustment Policy are the sole and exclusive remedies for breach of warranty. In observance of U.S. Federal law, this Limited Warranty and Adjustment Policy has been designated a "Limited Warranty".

WHAT IS COVERED UNDER THIS WARRANTY AND FOR HOW LONG

Bias and Radial Farm Tire Prorated Replacement

Özka bias and radial farm tires covered by this warranty that become unserviceable due to a defect in workmanship or material during the life of the original usable tread will be reimbursed to the owner on a prorated basis. You pay for the mounting, balancing, taxes, and fees. Warranty coverage ends 7 years from the date of manufacture as indicated by the factory serial # or

the date of purchase. Without proof of purchase, the date of manufacture and remaining tread depth will be used.

Özka Tire Prorated Replacement

Özka tires covered by this warranty that become unserviceable due to a defect in workmanship or material during the life of the original usable tread will be reimbursed to the owner on a prorated basis. You pay for the mounting, balancing, taxes, and fees. Warranty coverage ends 7 years from the date of manufacture as indicated by the serial # or the date of purchase. Without proof of purchase, the date of manufacture will be used. Credits will be determined by applying the lesser of: (a) the percentage of measured remaining tread depth; or (b) the maximum credit based on tire age (from purchase date or date of manufacture).

FIELD HAZARD COVERAGE

The Field Hazard Coverage under this Limited Warranty and Adjustment Policy covers new Özka tires purchased after September 1, 2022 (and manufactured after January 1, 2022) and used in normal agricultural applications. If, during normal use, a covered tire becomes unserviceable or not repairable due to field hazards, then the cost of a replacement Özka tire will be reimbursed to the owner on a prorated basis, provided the tire was not used in any manner other than originally specified by CMA. For tires to be eligible for a Stubble damage claim, a mechanical device must be used on the vehicle to knock down stubble prior to tires contacting the soil or surface. Tires must also run parallel to rows for the first tillage pass. Claims require proof that a device was in use.

TIRE TREAD DEPTH WEAR PERCENTAGE AGAINST FIELD HAZARD AND PRODUCT RESIDUAL DAMAGE				
	%0 - 20	%21 - 40	%41 - 70	%71 - 90
TIRE AGE (MONTHS)	Amount Payable to Customer			
0 - 12	80%	60%	30%	20%
13 - 24	70%	50%	20%	10%
25 - 36	25%	20%	15%	5%

* In the domestic evaluation, the prices shall be determined on basis as the highest discount rate applied to the distributor on 1st January of the current year.

* In the domestic evaluation, the sales prices shall be determined on basis as the amount of sale prices stated in the invoice.

BIAS AND RADIAL FARM

Bias and Radial Farm Tire Reimbursement Schedule

Özka bias and radial farm tires covered by this warranty that become unserviceable due to a defect in workmanship or material during the life of the original usable tread will be reimbursed to the owner on a prorated basis. You pay for the mounting, balancing, taxes, and fees. Warranty coverage ends 7 years from the date of manufacture as indicated by the serial # or the date of purchase. Without proof of purchase, the serial # date of manufacture will be used. Credits will be determined by applying the lesser of: (a) the percentage of measured remaining tread depth; or (b) the maximum credit based on tire age (from purchase date or date of manufacture).

BIAS AND RADIAL FARM TIRE ORIGINAL TREAD DEPTH WEAR PERCENTAGE						
	%0 - 10	%11 - 20	%21 - 40	%41 - 60	%61 - 80	%81 - 100
TIRE AGE (MONTHS)	Amount Payable to Customer					
0 - 12	100%	100%	80%	60%	40%	20%
13 - 24	100%	100%	60%	40%	20%	10%
25 - 36	85%	65%	45%	25%	15%	5%
37 - 48	75%	55%	35%	20%	10%	5%
49 - 60	45%	35%	25%	15%	10%	5%
61 - 72	25%	20%	15%	10%	5%	0%
73 - 84	20%	15%	10%	5%	0%	0%

Industrial, Forklift, Military, and Construction Tire Reimbursement Schedule

For Özka industrial, forklift, military, and construction tires, CMA will reimburse the owner according to the following schedules:

- * In the domestic evaluation, the prices shall be determined on basis as the highest discount rate applied to the distributor on 1st January of the current year.
- * In the domestic evaluation, the sales prices shall be determined on basis as the amount of sale prices stated in the invoice.

INDUSTRIAL, FORKLIFT, MILITARY, AND CONSTRUCTION TIRE ORIGINAL TREAD DEPTH WEAR PERCENTAGE									
	%0 - 10	%11 - 20	%21 - 30	%31 - 40	%41 - 50	%51 - 60	%61 - 70	%70 - 80	%81 - 100
TIRE AGE (MONTHS)	Amount Payable to Customer								
0 - 12	95%	85%	75%	65%	55%	45%	35	25	15
13 - 24	90%	80%	70%	60%	50%	40%	30	20	10
25 - 36	70%	60%	50%	40%	30%	20%	10	5	0
37 - 48	60%	50%	40%	30%	20%	10%	5	0	0
49 - 60	50%	40%	30%	20%	10%	5%	0	0	0
61 - 72	30%	20%	10%	5%	0%	0%	0	0	0
73 - 84	20%	10%	5%	0%	0%	0%	0	0	0

YOUR COSTS

The tire owner is responsible for paying all applicable sales, state, and local taxes, shipping fees, tire disposal fees, and any parts or service regardless of months of service or mileage. Service includes demounting/mounting, tire balancing, tire rotation, alignment, valve or valve stem replacement, tire repair, towing or any required road service provided. The tire owner is responsible for proper tire maintenance, including maintaining proper tire pressure.

SAFETY WARNINGS

Serious injury or property damage may result from:

- **Tire failure due to underinflation or overloading.** Follow the owner's manual or tire placard in vehicle.
- **Tire failure due to excessive high speed.** Follow the owner's manual or tire placard in vehicle.
- **Explosions of tire/rim assembly due to improper mounting.** Only specially trained persons should mount tires.
- **Failure to mount radial tires on approved rims.**
- **Failure to deflate single or dual assemblies completely before dismounting.**

Tire spinning. On slippery surfaces such as snow, mud, ice, etc., do not spin tires in excess of 35 mph (55 km/h), as indicated on the speedometer. Personal injury and severe damage may result, including tire disintegration or axle failure.

Limited manufacturer's warranty effective: January 1, 2022.

RIM DIAMETER	EQUIVALENCE TABLE OF INTERCHANGEABILITY FOR RADIAL AND DIAGONAL TIRES							
16	6.00 # 16	210/80 # 16	240/70 # 16	260/65 # 16				
16	6.50 # 16	260/70 # 16	280/65 # 16					
16	7.50 # 16	210/95 # 16	250/80 # 16	280/70 # 16	300/65 # 16	320/65 # 16		
16	8.25 # 16	300/70 # 16						
18	7.50 # 18	210/95 # 18	250/80 # 18	280/70 # 18	300/65 # 18	320/65 # 18		
18	10.5/80 # 18	300/70 # 18	340/65 # 18					
20	7.50 # 20	280/70 # 20						
20	9.5 # 20	8.00 # 20	250/85 # 20	260/80 # 20	300/70 # 20	340/65 # 20		
20	11.2 # 20	280/85 # 20	320/70 # 20					
20	12.4 # 20	320/85 # 20	340/80 # 20	340/75 # 20	360/70 # 20	420/65 # 20		
20	13.6 # 20	14.9L # 20	380/75 # 20	400/70 # 20	380/70 # 20	440/65 # 20		
20	12.4 # 28	320/85 # 28	360/70 # 28	420/65 # 28				
24	9.5 # 24	240/85 # 24	250/85 # 24	300/70 # 24	360/60 # 24			
24	11.2 # 24	280/85 # 24	320/70 # 24					
24	12.4 # 24	320/85 # 24	360/70 # 24	420/65 # 24				
24	13.6 # 24	340/85 # 24	380/75 # 24	380/70 # 24	400/70 # 24	440/65 # 24		
24	14.9 # 24	380/85 # 24	420/70 # 24	460/70 # 24	480/65 # 24			
24	16.9 # 24	420/85 # 24	480/70 # 24	480/75 # 24	540/65 # 24			
26	16.9 # 26	480/70 # 26	540/65 # 26					
26	18.4 # 26	460/85 # 26	520/70 # 26	580/70 # 26	750/50 # 26			
26	23.1 # 26	28 L # 26	620/75 # 26	650/70 # 26	750/65 # 26			
28	9.5 # 28	240/85 # 28	250/85 # 28	340/65 # 28				
28	11.2 # 28	280/85 # 28	320/70 # 28					
28	13.6 # 28	340/85 # 28	380/70 # 28	440/65 # 28	480/60 # 28			
28	14.9 # 28	380/85 # 28	420/70 # 28	420/75 # 28	480/65 # 28	520/60 # 28		
28	16.9 # 28	420/85 # 28	480/70 # 28	480/75 # 28	540/65 # 28	600/60 # 28		
28	18.4 # 28	540/75 # 28	600/65 # 28					
30	14.9 # 30	380/85 # 30	420/70 # 30					
30	16.9 # 30	420/90 # 30	420/85 # 30	480/70 # 30	480/75 # 30	540/65 # 30	600/60 # 30	
30	18.4 # 30	21L # 30	460/85 # 30	520/70 # 30	600/65 # 30	710/55 # 30		
30	23.1 # 30	620/75 # 30	650/70 # 30	710/65 # 30				
32	8.3 # 32	210/95 # 32						
32	9.5 # 32	230/95 # 32	270/80 # 32	270/75 # 32				
32	12.4 # 32	320/85 # 32						
32	24.5 # 32	650/75 # 32	680/70 # 32	800/60 # 32				
32	30.5 L # 32	710/75 # 32	680/75 # 32	800/65 # 32	850/60 # 32	900/55 # 32	1050/50 # 32	
34	14.9 # 34	380/85 # 34						
34	16.9 # 34	420/85 # 34	480/70 # 34	480/75 # 34	500/70 # 34	540/65 # 34	600/60 # 34	
34	18.4 # 34	460/85 # 34	520/70 # 34	520/75 # 34	540/70 # 34	600/65 # 34	710/55 # 34	800/50 # 34
34	20.8 # 34	23 L # 34	620/75 # 34	710/70 # 34	650/65 # 34	710/60 # 34		
36	8.3 # 36	210/95 # 36						
36	12.4 # 36	320/85 # 36						
36	13.6 # 36	340/85 # 36						
36	9.5 # 36	230/95 # 36	270/80 # 36					
36	11.2 # 36	270/95 # 36						
38	9.5 # 38	230/95 # 38						
38	11.2 # 38	270/95 # 38	290/90 # 38					
38	12.4 # 38	320/85 # 38						
38	13.6 # 38	15.5 # 38	340/85 # 38	380/80 # 38	400/75 # 38			
38	14.9 # 38	380/85 # 38						
38	16.9 # 38	420/85 # 38	480/70 # 38	480/75 # 38	540/65 # 38	600/60 # 38		
38	18.4 # 38	460/85 # 38	520/70 # 38	520/75 # 38	600/65 # 38	650/60 # 38		
38	20.8 # 38	520/85 # 38	580/70 # 38	620/70 # 38	650/65 # 38	710/65 # 38	710/60 # 38	850/50 # 38
42	9.5 # 42	230/95 # 42						
42	11.2 # 42	270/95 # 42	300/85 # 42					
42	12.4 # 42	300/95 # 42						
42	18.4 # 42	460/85 # 42	480/80 # 42	600/65 # 42				
42	20.8 # 42	520/85 # 42	580/70 # 42	620/70 # 42	650/65 # 42	750/60 # 42	710/60 # 42	850/55 # 42
44	8.3 # 44	210/95 # 44						
44	9.5 # 44	230/95 # 44						
46	12.4 # 46	270/95 # 46	300/95 # 46	320/90 # 46	340/85 # 46			
46	20.8 # 46	520/85 # 46	650/65 # 46	620/70 # 46				
48	9.5 # 48	230/95 # 48						
48	13.6 # 48	340/85 # 48						

“#” Symbol can be replaced with “R” for Radial, “-” or “D” for Diagonal tires

Notes



Corporate Office





406 E. Huntington Drive, Suite 200

Monrovia, California USA 91016

Tel: +1 888 226-5250

info@cmaintl.com

www.cmaintl.com



www.OzkaTires.us

